



RELAY SWITCHES FOR NIKKO STARTERS

6744-0121

Dimensions

Harness length: 100mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 90mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-608_; 843_


Application

Komatsu

WHITE / GREEN



BLACK / WHITE

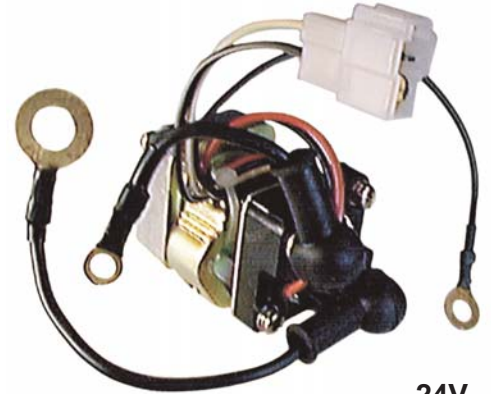

24V

6744-0122

Dimensions

Harness length: 25mm
Ground wire: Eyelet ø6mm; Length 105mm
S Wire: Eyelet ø5mm; Length 170mm
B+ Wire: Eyelet ø10mm; Length 95mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-644


Application

Komatsu

WHITE / GREEN



BLACK / WHITE

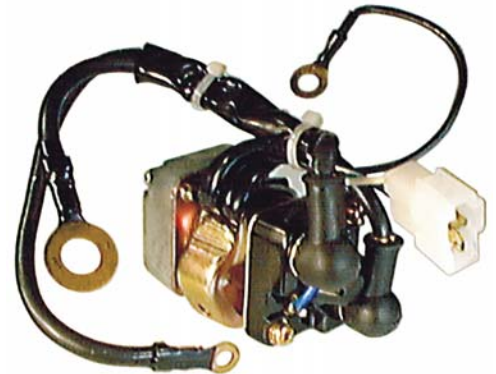

24V

6744-0123

Dimensions

Harness length: 100mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 110mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-652_


Application

Komatsu

WHITE / GREEN



BLACK / WHITE

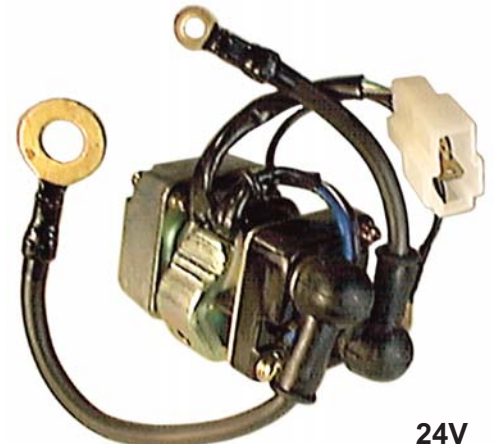

24V

07.09.2006



PRODUCT NEWS

No. 6744_000_001

RELAY SWITCHES FOR NIKKO STARTERS

6744-0124

Dimensions

Harness length: 100mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 110mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-656_ ; 849_


Application

Komatsu

WHITE /
GREEN



BLACK /
WHITE

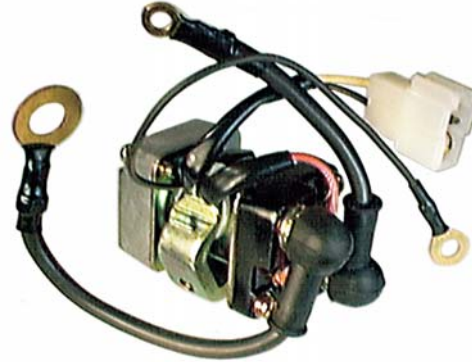

24V

6744-0125

Dimensions

Harness length: 75mm
Ground wire: Eyelet ø6mm; Length 105mm
S Wire: Eyelet ø4mm; Length 110mm
B+ Wire: Eyelet ø10mm; Length 140mm
Bracket @ 3:30; Wires @ 12:00

Replaces

Nikko: 0-25000-697_


Application

Komatsu

WHITE /
GREEN



BLACK /
WHITE

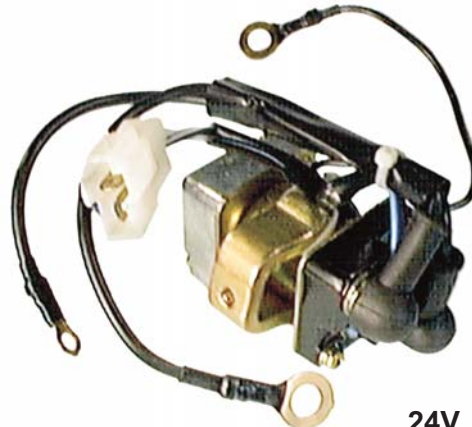

24V

6744-0126

Dimensions

Harness length: 325mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 90mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-609_

Application

Komatsu

WHITE /
GREEN



BLACK /
WHITE



24V

07.09.2006



RELAY SWITCHES FOR NIKKO STARTERS

6744-0221

Dimensions

Harness length: 325mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 110mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-685_ ; 810

Application

Komatsu

WHITE / GREEN



BLACK / WHITE



24V

6744-0222

Dimensions

Harness length: 325mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 140mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-695_


Application

Komatsu

WHITE / GREEN



BLACK / WHITE

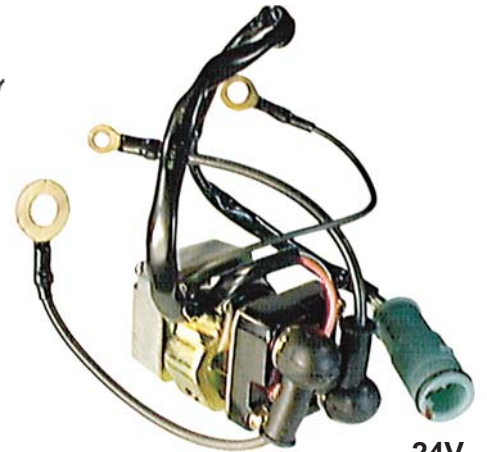

24V

6744-0223

Dimensions

Harness length: 375mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 110mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-679_

Application

Komatsu

WHITE / GREEN



BLACK / WHITE



24V

07.09.2006

RELAY SWITCHES FOR NIKKO STARTERS

6744-0224

Dimensions


Harness length: 400mm
Ground wire: Eyelet ø6mm; Length 105mm
S Wire: Eyelet ø5mm; Length 170mm
B+ Wire: Eyelet ø10mm; Length 120mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-705_; 839_

Application

Komatsu

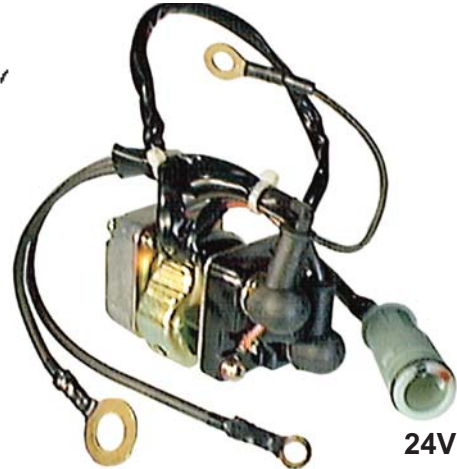

24V

6744-0225

Dimensions


Harness length: 325mm
Ground wire: Eyelet Ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 110mm
B+ Wire: Eyelet Ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-687_

Application

Komatsu

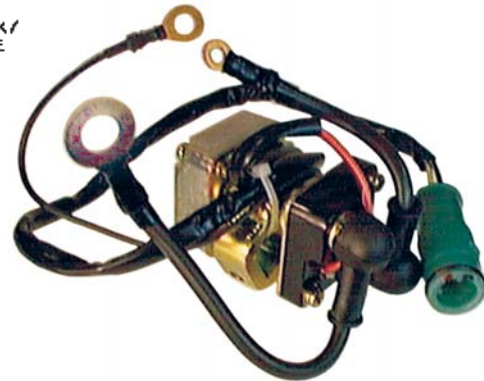

24V

6744-0321

Dimensions



Harness length: 325mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 140mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-728_

Application

Komatsu

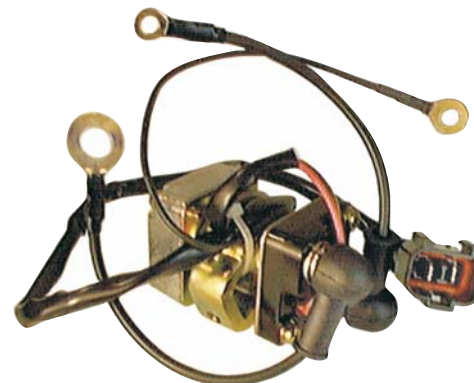

24V

07.09.2006



RELAY SWITCHES FOR NIKKO STARTERS

6744-0322

Dimensions



Harness length: 325mm
Ground wire: Eyelet ø5mm; Length 95mm
S Wire: Eyelet ø5mm; Length 140mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-777_

Application

Komatsu

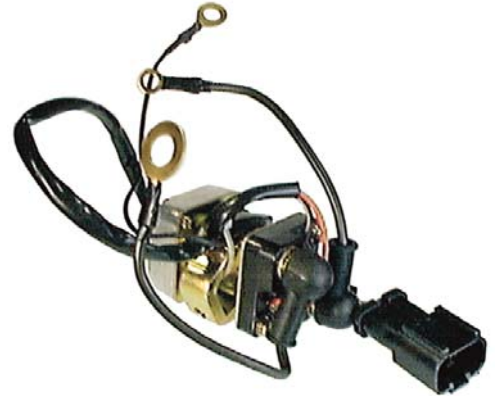

24V

6744-0323

Dimensions



Harness length: 375mm
Ground wire: Eyelet ø 6mm; Length 95mm
S Wire: Eyelet ø 5mm; Length 110mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-732_

Application

Komatsu

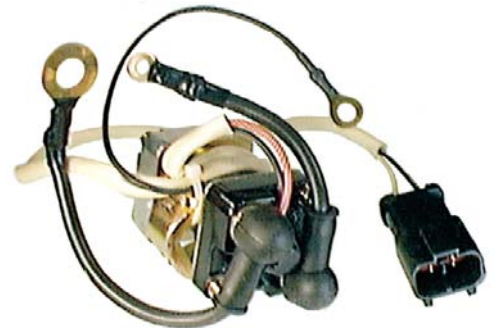

24V

6744-0324

Dimensions



Harness length: 400mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 110mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-734_ ; 834_

Application

Komatsu

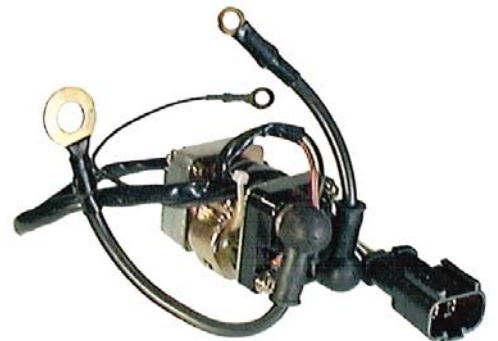

24V

06.07.2006



PRODUCT NEWS

No. 6744_000_001

RELAY SWITCHES FOR NIKKO STARTERS

6744-0421

Dimensions


Harness length: 325mm
Ground wire: Eyelet ø5mm; Length 110mm
S Wire: Eyelet ø10mm; Length 150mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-689_ ; 837_

Application

Komatsu

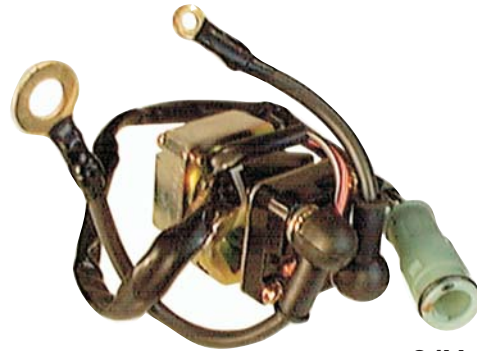

24V

6744-0422

Dimensions


S Wire: Eyelet ø5mm; Length 140mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-690_

Application

Komatsu

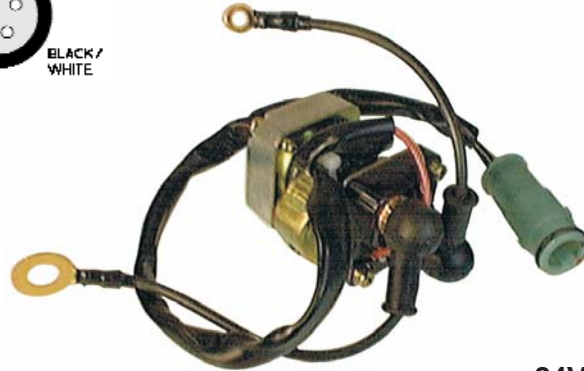

24V

6744-0423

Dimensions

S Wire: Eyelet ø5mm; Length 170mm
B+ Wire: Eyelet ø10mm; Length 95mm

Replaces

Nikko: 0-25000-696_

Application

Komatsu



24V

07.09.2006



RELAY SWITCHES FOR NIKKO STARTERS

6744-0521

Dimensions

Harness length: 150mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø4mm; Length 100mm
B+ Wire: Eyelet ø8mm; Length 80mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-622_

Application

Isuzu



WHITE / GREEN
FEMALE
BULLET

BLACK / WHITE
MALE
BULLET



24V

6744-0522

Dimensions

Harness length: 150mm
Ground wire: Eyelet ø6mm; Length 95mm
S Wire: Eyelet ø5mm; Length 140mm
B+ Wire: Eyelet ø10mm; Length 150mm
Bracket @ 4:30; Wires @ 12:00

Replaces

Nikko: 0-25000-632_ ; 781_


Application

Isuzu



WHITE / GREEN
FEMALE
BULLET

BLACK / WHITE
MALE
BULLET

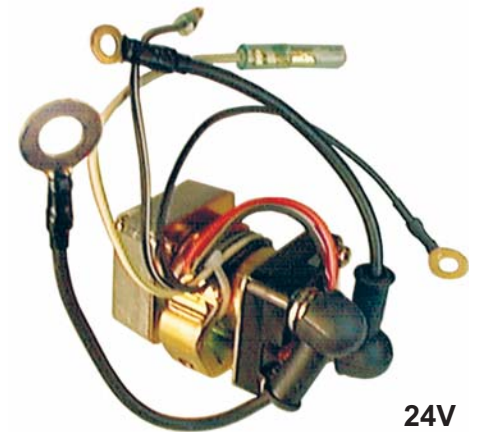

24V

6744-0523

Dimensions

Harness length: 150mm
Ground wire: Eyelet ø6mm; Length 160mm
S Wire: Eyelet ø5mm; Length 185mm
B+ Wire: Eyelet ø10mm; Length 165mm
Bracket: 2-Hole, Base Mount

Replaces

Nikko: 0-25000-782_


Application

Isuzu



WHITE / GREEN
FEMALE
BULLET

BLACK / WHITE
MALE
BULLET

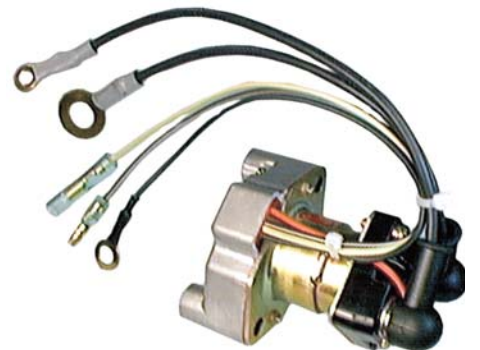

24V

07.09.2006



PRODUCT NEWS

No. 6744_000_001

RELAY SWITCHES FOR NIKKO STARTERS

6744-0611

Dimensions

Ground wire: Eyelet \varnothing 6mm; Length 145mm

S Wire: Eyelet \varnothing 5mm; Length 100mm

B+ Wire: Eyelet \varnothing 10mm; Length 105mm

Replaces

Nikko: 0-25000-688_

Application

Isuzu



BLACK/
WHITE
MALE
BULLET



12V

6744-0612

Dimensions

Ground wire: Eyelet \varnothing 6mm; Length 145mm

S Wire: Eyelet \varnothing 5mm; Length 170mm

B+ Wire: Eyelet \varnothing 10mm; Length 150mm

Replaces

Nikko: 0-25000-646_

Application

Isuzu



BLACK/
WHITE
MALE
BULLET



12V